




A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable, Auto Calendar
- Snooze
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

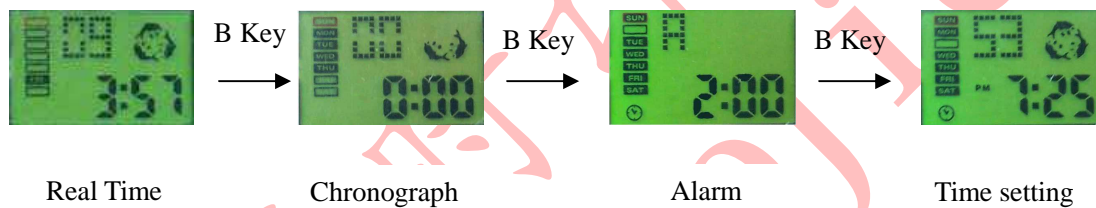

1. At any state ,press A or E key EL backlight for 3s .

2. Real Time

- Press C key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm and Chime
 - a). Press C + D key to turn on / off Alarm ,indicator " ⌚ " displaying for On .
 - b). Press C + B key to turn On / Off Chime ,all days of week displaying for On .

3. Chronograph

- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count .
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press C key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press C key to confirm
- Press B key to return to Real Time mode

- Alarm Snooze ON/OFF
At Alarm sounding state ,press C key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

5. Time Setting

- "Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :
Minute → Hour → Day → Month → Week
- Press D key to adjust the flashing item.
- When setting "Hour " ,"H" display for 2 4 H format ;" A " or " P " for 1 2 H format .

C. Specifications

- Module Size : $\Phi 30.20$ mm
- Module Thickness : 8.20 ± 0.15 mm
- Operational Temperature Range : $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : ± 90 sec/month
- Battery Code : CR2025
- Current Consumption for Digit (maxima) : ≤ 3.5 μ A(T=25 $^{\circ}$ C)
- Current Consumption for Digit (averagely) : ≤ 2.5 μ A(T=25 $^{\circ}$ C)
- Alarm Current : ≤ 2.5 mA
- EL Current : ≤ 10 mA
- Battery life 2 backlight operation (6 seconds) per day : 24 month (Japan Lithium)
20 seconds of alarm operation per day

	Prepared	Checked	Approve
Name	冯碧颜	徐治中	宋检望
Date	08/03/18	08/03/18	08/03/18