

LIGHT/RESET (A Key) ———

MODE (B Key) ———




———— (C Key) START

A . Features

- 10 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

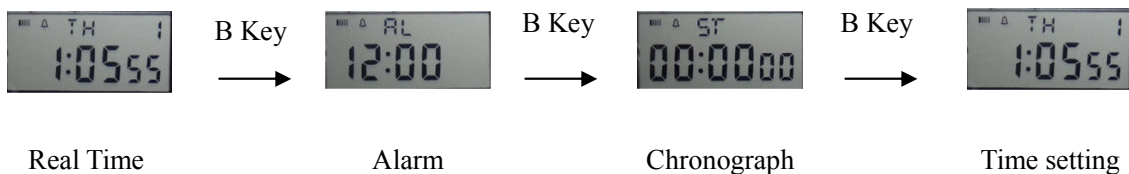

1. At any state ,press A key EL backlight for 3s .

2. Real Time

- In Time Mode , press C key to toggle between .12HR and 24HR display format.

3. Daily Alarm

- Turn On / Off Alarm and Chime
Press C key to turn on/off Alarm (“ ■■■■ ”) or Chime (“ 🔔 ”)
- The alarm tone sounds at the preset time for about 20 seconds .Pressing any button stops the alarm tone operation .
- Alarm setting : Press A key to select "Hour " or "Minute "setting, Press C key to adjust the flashing item, Press A key to confirm, Press B key to return to Real Time mode.

4. Chronograph

- The display range of the Chronograph is 23hour,59 minutes,59.99seconds
- Press C key to Start/Stop running ;
- When stop ,press A key to zero .
- When running ,press A key to split count.
- Then press C key to exit split count ,and stop counting ; press A key to display all counts ,press A key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

5. Time Setting

- "Second " flashing when loading ,press C key to zero ; Press A key to select item as following sequence :
Hour → Minute → Month → Day → Day of Week → Second
- Press C key to adjust the flashing item.
- Press C key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : 28*26*25.8mm
- Module Thickness (include buzzer): 7.0mm
- Operational Temperature Range : -10°C~60°C
- Operational Voltage : 3.0V
- Accuracy : ±90sec/month
- Battery Code : CR2016(capacitance: 90m Ah)
- static average current : ≤1.66u A (static maximum current : 3.0uA)
- Alarm average current : ≤1.85m A (Alarm maximum current : 4.5mA)
- EL lighten average current : ≤7.26m A (ELlighten maximum current : 10.0mA)
- Battery life (85%) : ≥24 month(Japan Lithium)

Under the following conditions:(4 backlight operation (3 seconds) perday; 60 seconds of alarm operation per day)

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	汤志平
Date	16/09/18	16/09/18	16/09/18